


4 WIRE RESISTIVE TOUCHSCREEN

4 wire resistive touch screen is an outstanding high quality touch panel with cost effective solution for many applications. It is suitable for low cost solution and superior value. It is inherently of many advantages containing exact and fast response, touch by any object, liquid resistance against contamination. Now a days design engineers, System Integrators and OEMs are increasingly using resistive touch screens for applications including point- of- sale, process control, replacing the traditional mechanical switching, portable devices, and personal information management systems.

Sizes available from 3.5, 3.8", 4.3", 5.7", 6.4", 7", 8.4", 10.4", 12.1", 15", and the customized size as per the requirements. [Call us](#) for getting the right touch solution for your PLC, SCADA and Process control instruments, equipment applications

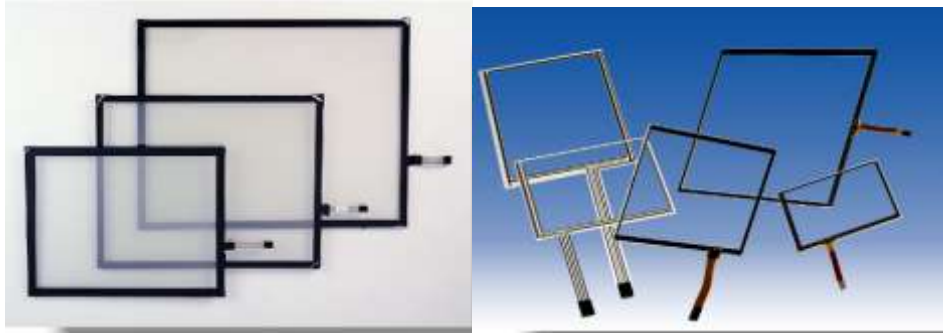

Touch Technology	4-wire Analog Resistive Touch Screen
Material	Top: Hard-coated polyester; Bottom: Glass
Spacer	Invisible (Patented)
Light Transmission	75% nominal
Touch Resolution	2048 x 2048 (with standard controller)
Controller	USB / RS232
Platforms	Win XP, 2K, 98, 95, NT, Linux, Win 7,8 &10
Power	USB
Activation Force	30 -120 grams per square centimeters
Response Time	10 msec maximum
Position Accuracy	3 mm maximum error
Touch Mode	Click, double click, right click, drag, drop
Operating Temperature	-10 to 70 degrees C
Storage Temperature	-30 to 85 degrees C
Thermal Shock	Pass -20 to 80 degrees C 5 cycles
Relative Humidity	Pass 40 degrees C, 95%RH, 96 hours
Operating Altitude	0 - 4,500 meters
Storage Altitude	0 - 13,500 meters
Abrasion Resistance	3H pencil hardness
Chemical Resistance	Excellent to alcohol, acetone, detergent
Durability	3,000,000 touches per point minimum

SIZES READILY AVAILABLE

Sr. No.	Size of touch screen	Dimensions			
		Overall Dimensions (mm)		Active Area (mm)	
1	3.5" 4W	63.9	76.9	52.36	69.88
2	3.8" 4W	65	87	58	76.50
3	5.7" 4W	132.5	104.7	116	87.7
4	6.4" 4W	142	116	133	101
5	7" 4W	103.8	164.8	91.44	152.4
6	8.4" 4W	149	189.35	126.5	168.8
7	10.4" 4W	255.55	172.95	211.2	158.8
8	12.1 4W	280	200	246	184.7

Contact for Sales

SoftTouch Technologies

Office #18, First Floor, Raka Palace, Near Indian Overseas Bank Chinchwad, Pune – 411 033 Maharashtra, India	Works #46,47 B Wing, Sanghvi Steel Compound, Mohan Nagar, Chinchwad, Pune – 411019 Maharashtra, India
---	---

Office Phone: +91-20-64100281 / 65103865

Email: sales@softtouch.co.in

URL: www.softtouch.co.in

International Sales Contact

Anand Kelkar

+919766606301

anand@softtouch.co.in